

Docket No.
068856/221
HMG

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Donald J. Urbas, David Ellwood, Eric B. Weddington
Serial No. : New Application
Filed : Concurrently Herewith
Title : IMPLANTABLE INDUCTIVELY PROGRAMMED
TEMPERATURE SENSING TRANSPONDER

**DECLARATION CLAIMING SMALL ENTITY STATUS
UNDER 37 C.F.R. 1.9(f) AND 1.27(c) - SMALL BUSINESS CONCERN**

I hereby declare that I am an official of the small business concern empowered to act on behalf of the concern identified below:

BIO MEDIC DATA SYSTEMS, INC.
One Silas Road
Seaford, Delaware 19973

I hereby declare that the above identified concern qualifies as a small business concern as defined in 13 C.F.R. §§ 121.801 through 121.805, in accordance with 37 C.F.R. § 1.9(d), for purposes of paying reduced fees under Sections 41(a), (b) and (h) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement:

- (1) In calculating the number of employees of the business concern: (a) the average numbers of employees is used (including employees of domestic and foreign a

affiliates) based upon numbers of employees for each of the pay periods for the preceding completed 12 calendar months; (b) part-time and temporary employees are counted the same as full-time employees; (c) if the concern has not been in business for 12 months, the average number of employees is used for each of the pay periods during which it has been in business; and (d) the treatment of employees of former affiliates or recently acquired affiliates is the same as for size determinations using annual receipts under 13 C.F.R. § 121.104(d); and

- (2) Concerns are affiliates of each other when one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled IMPLANTABLE INDUCTIVELY PROGRAMMED TEMPERATURE SENSING TRANSPONDER by inventors Donald J. Urbas, David Ellwood and Eric B. Weddington, as filed concurrently herewith.


If the rights held by the above identified small business concern are not exclusive, each person, concern or organization having rights to the invention is listed below and no rights to the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37 C.F.R. § 1.9(c), or by any concern which would not qualify as a small business concern under 37 C.F.R. § 1.9(d) or a nonprofit organization under 37 C.F.R. § 1.9(e).

No such person, concern or organization.

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. 37 C.F.R. § 1.28(b).

I hereby declare that all statements made herein or my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

BIO MEDIC DATA SYSTEMS, INC.

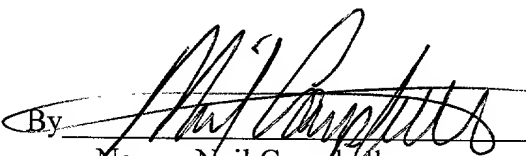, 1999 By 
Name: Neil Campbell
Title: President

APPLICATION OF

**DONALD J. URBAS
DAVID ELLWOOD
ERIC B. WEDDINGTON**

FOR LETTERS PATENT OF THE UNITED STATES

FOR

**IMPLANTABLE INDUCTIVELY PROGRAMMED
TEMPERATURE SENSING TRANSPONDER**

"Express Mail" Mailing Label

Number: **EM50448777US**

Date of Deposit: February 11, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to: *Assistant Commissioner for Patents, Washington, D.C. 20231.*

Name: **Howard M. Gitten**

Signature: 

Howard M. Gitten

Registration No. 32,138

Attorney for Applicants

STROOCK & STROOCK & LAVAN LLP

180 Maiden Lane

New York, New York 10038

(212) 806-6669

Client/Matter No. 068856/221

IMPLANTABLE INDUCTIVELY PROGRAMMED TEMPERATURE SENSING TRANSPONDER

BACKGROUND OF THE INVENTION

The present invention is directed to an implantable inductively programmable temperature sensing transponder, and, more particularly, to a transponder having operations which may be modified through software control

Implantable programmable temperature transponders are passive devices that are implanted under the skin of laboratory animals, by way of example, for positive animal identification. As is known in the art, conventional transponders, such as those sold by Bio Medic Data Systems, Inc. include a coil antenna coupled to an integrated circuit (IC) chip. The chip includes a memory and a thermistor. Circuitry is provided for receiving an interrogation signal, deriving power from the interrogation signal, deriving timing clocks from the interrogation signal, and controlling the memory and the thermistor to output data stored in the memory or temperature information sensed by the thermistor to the interrogator. It is also known in the art to program input data to the on-board memory of the transponder.

This prior art transponder has been satisfactory. However, it suffers from the disadvantage that the integrated circuitry required too much power for operation in the READ MODE. This resulted in the reduced read distance between the transponder and interrogator. The memory, which included an EEPROM was too small and the temperature data was required to be transmitted over the top of sixteen of the memory bits making them unusable. Although the prior art taught locking the data in the memory to preserve the integrity of the memory, the lock was permanent and could not be selectively changed by the transponder user as needed. Furthermore, in the prior art, synchronization between the transponder and interrogator has been performed utilizing a preamble of the transponder's data signal. Because the entire data signal was required to be transmitted as well as the preamble during any synchronization process, time was wasted, slowing down the overall programming and/or

read cycle. Furthermore, a single temperature reading taken by the transponder was sent to the interrogator and used as the temperature. Many factors can affect the reading and recording of temperature in a transponder so that there would be fluctuations between successive temperature readings. In effect, a floating temperature value would occur reducing the precision of the temperature read. Lastly, during programming, utilizing conventional signal encoding techniques, the timing of the signal transmitted between the transponder and interrogator was critical. However, because timing was so critical, noise or other environmental factors could readily disrupt the signal, damaging the results.

Accordingly, an implantable programmable temperature transponder which overcomes the shortcomings of the prior art is desired.

SUMMARY OF THE INVENTION

An implantable programmable temperature transponder includes a receiver for receiving a programming signal. A memory has a plurality of addresses therein. The data being separated into two portions, a data storage portion and a lock portion, the data portion being capable of storing a plurality of subsets of bits, each subset of bits corresponding to a character. The lock portion stores a plurality of locks, each lock corresponding to a respective subset of bits corresponding to each character. An address module addresses each address within the memory. A data module receives data to be programmed and stores data in the memory at the address selected by the address module; the lock section allowing storing of data in the memory at the selected address if the corresponding lock is clear and preventing storing of data in the memory if the corresponding lock is set.

In a preferred embodiment, the implantable programmable temperature transponder includes a comparator for comparing a programming signal with a reference voltage and outputting a comparison signal in response thereto. A transmitter receives the comparison signal and outputs a first indicator signal if the received voltage is less than the reference

voltage and outputs a second signal if the input voltage is greater than the reference voltage; the first signal being the inverse of the second signal for indicating to the interrogator the sufficiency of the input programming signal. The programming signal may be pulse space modulated.

In a preferred embodiment, the implantable programmable temperature transponder includes a clock generator for enabling current to be supplied to the memory during programming, turning off the current to the memory after each successive address has been addressed.

A temperature module including a thermistor is coupled to the data module. The temperature module includes a free-running counter which is continuously counting the output of the thermistor. A clock generator counts predetermined periods, the current count of the temperature module counter being latched and output to the interrogator at the end of each period. The interrogator receives a number of these counts, and determines the difference between successive counts to obtain a plurality of actual count numbers having occurred in each elapsed time period. These actual counts are then aggregated. The aggregate value of the differences is divided by the total time for obtaining the number of samples to obtain an average count per time or frequency. Knowing the thermistor's inherent relationship between frequency and temperature, the temperature corresponding to that frequency is known and is output by the interrogator as the temperature.

Accordingly, it is an object of the invention to provide an improved implantable temperature transponder.

Another object of the invention is to provide a transponder which minimizes power used during programming and reading of the transponder.

A further object of the invention is to provide a transponder which speeds up the voltage synchronization process with an interrogator.

Yet another object of the invention is to provide a transponder with expanded memory and the ability to transmit temperature data separately from the data stored in memory so that all the memory addresses can be used.

Another object of the invention is to provide a more precise temperature reading.

Still another object of the invention is to provide a memory which provides varying levels of memory protection including the ability for the transponder user to selectively lock the data stored in the memory.

Still other objects and advantages of the invention will in part be obvious and will in part be apparent from the specifications and drawings.

The invention, accordingly, comprises the features of constructions, combinations of elements, combinations of steps, and arrangement of parts which will be exemplified in the construction as hereinafter set forth and the scope of the invention will be indicated in the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

For a fuller understanding of the invention, reference is had to the following description in connection with the accompanying drawings, in which:

FIG. 1 is a block diagram of an interrogator/transponder system;

FIG. 2 is a more detailed block diagram showing the transponder control logic constructed in accordance with the invention;

FIG. 3 is a schematic diagram showing a format for the memory constructed in accordance with the invention;

FIG. 4 is a schematic diagram showing a format for the status byte of the memory format constructed in accordance with the invention;

FIG. 5 is a timing diagram of a voltage synchronization indication signal sent by the transponder to the interrogator in accordance with the invention;

FIG. 6 is a timing diagram of a programming signal output in accordance with the invention;

FIG. 7 is a schematic diagram of a format for the content of the programming signal;

FIGS. 8(A), 8(B) are flow charts showing the method for programming the transponder in accordance with the invention;

FIGS. 9(A), 9(B) are flow charts showing the method for measuring the temperature in accordance with the invention;

FIG. 10 is a flow chart showing the method for determining the integrity of the data read from the transponder; and

FIG. 11 is a circuit diagram of a clamp circuit constructed in accordance with the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Reference is first made to FIG. 1 in which an interrogator, generally indicated as 10 and a transponder generally indicated as 20 are shown. Interrogator 10 and transponder 20 communicate with each other through inductive coupling as known in the art from U.S. Patent No. 4,730,188. As will be discussed below, interrogator 10 provides a signal to transponder 20 which provides power to transponder 20, a clock signal and an operational command such as enter the PROGRAM MODE or TEMPERATURE MODE. Transponder 20 sends a return signal containing information therein to interrogator 10 as is known in the art.

Interrogator 10 includes a CPU 12 for generating command/power/clock signals (collectively interrogator signals) in response to the user inputs. These signals are input to an antenna 14 for broadcast to transponder 20.

An antenna 22 within transponder 20 receives the interrogator signal from interrogator 10 and inputs a 364 kHz signal to a rectifier 24 (FIG. 2) which receives the AC signal from the antenna 22 and rectifies the signal. The rectified signal is then passed to a control logic

circuit 26 which, in response to the rectified interrogator signal will either read out data from the memory 28, program data into a memory 28, or read out temperature data from a temperature module 30. Temperature module 30 includes a thermistor 32 which changes resistance levels in response to changes in temperature which can be converted into a frequency as is known in the art, the frequency changing as a function of temperature. The temperature data and data from memory 28 are output under the control of control logic 26 through a modulator 34 for modulating the signal as known in the art to be transmitted by antenna 22 back to interrogator 10 where the data is operated upon by CPU 12 of interrogator 10.

Reference is now made to FIG. 2 in which a block diagram showing the circuitry of transponder 20, and in particular control logic 26, in greater detail is provided. The rectifier 24 includes a diode arrangement for rectifying the input signal and a clamp 23 for regulating the voltage level V_{ss} to the transponder components of the Clamp 23 simulates the behavior of a Zener diode. Clamp 23 includes four metal oxide semiconductor field effect transistors (MOSFETs) Q1-Q4, resistors R1-R3, and voltage connections V_{pos} and V_{ss} . In effect, the electronic circuit is a MOSFET Zener circuit providing IC protection to the remainder of the transponder circuitry by clamping the voltage. The MOSFET Zener clamp 23 connects V_{pos} to the incoming positive voltage power supply and connects V_{ss} to ground.

In clamp 23, transistors Q1 and Q4 are N-channel MOSFETs, while transistors Q2 and Q3 are P-channel MOSFETs. Transistor Q4 must be much larger in size than transistors Q1-Q3 because it must be able to pass a large amount of current from V_{pos} to V_{ss} . In a preferred embodiment, transistor Q4 is at least twenty times larger than the other MOSFETs.

As shown in FIG. 11, resistor R1 is connected at one end to V_{pos} and at the other end it is connected to the gate of transistor Q1 and to resistor R2. Resistor R2 is connected at one end to the gate of transistor Q1 and resistor R1 and at its other end is connected to V_{ss} . Resistor R3 is connected at one end to the gate of transistor Q4 and the drain of transistor Q3

0502656 "02100

and the other end is connected to Vss. The gate of transistor Q1 is connected to resistors R1, R2 while the source of transistor Q1 is connected to Vss and the drain is connected to the gates of transistors Q2, Q3 and the drain of transistor Q2. The gate of transistor Q2 is connected to the gate of transistor Q3, the drain of transistor Q1 and its own drain. The source of transistor Q2 is connected to Vpos and the drain of transistor Q2 is connected to the drain of transistor Q1 and the gates of transistors Q2, Q3. The drain of transistor Q3 is connected to resistor R3 and the gate of transistor Q4. The drain of transistor Q4 is connected to Vpos.

During operation, resistors R1, R2 act as a voltage divider and control clamp threshold voltage. When the voltage on the gate of transistor Q1 rises, transistor Q1 will turn on, allowing current to pass through its drain and source. Transistors Q2, Q3 act as a current mirror so that whatever current is on the drain of transistor Q2 is the same amount of current on the drain of transistor Q3. With a current on the ~~source~~ ^{DRAW 00.223 1/2/80 0.2. DJL 2.3.00} of transistor Q3 and resistor R3, a voltage will be present on the gate of transistor Q4. ~~The value of transistor.~~ ^{00.223 1/2/80 0.2. DJL 2.3.00} The value of transistor R3 determines the gain of the device. In other words, with a large value for resistor R3, the voltage on the gate of transistor Q4 rises faster than the voltages at Vpos. The value of transistor R3 then controls the speed at which the clamp acts.

As the voltage rises on the gate of transistor Q4, it will turn on, allowing current to pass through the drain and source. When transistor Q4 dumps current from Vpos to Vss, this keeps the voltage of Vpos at a constant level thereby clamping the supply voltage to the remainder of the integrated circuit, protecting the integrated circuit from a damaging over voltage condition. In a preferred embodiment transistor Q1 will start to turn on at approximately four volts and transistor Q4 will turn on and dump enough current to limit Vpos to approximately five volts.

Clamp 23 limits the supply voltage for the rest of the integrated circuit. Usually, integrated circuit devices do not need voltage limitation as integrated circuit devices are used

with a controlled power source. In other words, the range of voltage that must be supplied to the chip and any regulation or limitation of power is done off chip. On the other hand, because the transponder is powered by an interrogator which provides an unknown voltage level to the interrogator, the protection from an over voltage condition is supplied on chip by the clamp.

The ~~rectified~~ signal serves as a master clock input to a clock generator 36. Clock generator 36 divides down the master clock signal and provides timing signals and enabling signals to a data module 40, address module 38, and memory 28.

Control logic 26 includes address module 38 for receiving signals from the clock generator and addressing an identified address within memory 28 in response to the clock generator signals. A data module 40 receives latch signals from clock generator 36, data from memory 28, temperature data from temperature module 30 and outputs data in response to these signals to a transmitter 42. Transmitter 42 transmits an output signal containing the data through modulator 34 which modulates the output signal output by transmitter 42.

A receiver 44 receives the data signal output by interrogator 10 after processing by a comparator 47 and outputs the received data to address module 38. A program control 46 receives data from memory 28 and a program bit from data module 40, an address from address module 38 and in response thereto outputs a program enable signal to clock generator 36 which in turn enables the programming of data in memory 28.

As described below, comparator 47 also acts as a voltage synchronization circuit and receives the interrogator signal and compares the interrogator signal to a reference voltage; 2.5 volts by way of example. The comparator outputs a signal in response to the received interrogator signal and outputs the signal to the transmitter 42 which, in turn, outputs the signal through modulator 34 to antenna 22 to be transmitted to interrogator 10.

As shown in FIG. 3, in a preferred embodiment, memory 28 is an EEPROM. Memory 28 is structured so as to have a status byte region 50, a temperature calibration region 52, a

CRC region 54, a data region 56, and a user lock region 58. Temperature calibration region 52 includes a temperature adjustment value which is the offset between the calculated or sensed temperature sensed by temperature module 30 and the actual temperature of whatever is being monitored. The data stored in temperature calibration portion 52 is output to interrogator 10 along with temperature data from temperature module 30 and interrogator 10 through CPU 12 calculates the actual temperature as is known in the art.

CRC region 54 is an integrity check for the data stored in memory 28 as is known in the art, utilizing standard polynomial equations to compare and verify the data in memory.

Data region 56 stores user programmable information input from interrogator 10 while in PROGRAM MODE as discussed below and read from the memory during READ MODE. The data is stored as bits 57 which in combination represent characters. In a preferred embodiment, the least significant character is stored with the least significant bit of the character starting at the least significant bit in the least significant byte of data region 56 and goes upwards to the most significant bit of the character and the most significant bit in the most significant byte of data region 56. A number of bits 57 corresponds to a character. In a preferred embodiment, utilizing the compression techniques, each character can be represented by less than one byte. In a preferred embodiment, the data portion stores enough data to represent 32 characters formed as a plurality of discrete subsets of bits 57 in data region 56.

User lock region 58 is divided into bits 59. Each bit corresponds to a character stored in data region 56. Each bit represents the lock state of the respective character in the data. For example, if a zero is stored in the least significant bit of the user lock region which corresponds to the bits corresponding to the least significant bits for the least significant character stored in data region 56 then the lock is "clear". The user lock bit is "set" by storing a one in the desired bit of user lock region 58. For example, if the character data is stored as bytes, the least significant bit of the least significant byte of user lock region 58 corresponds

to the least significant character in data region 56 and the most significant bit of the most significant byte corresponds to the most significant character. It should be noted that any other mapping arrangement of lock bits to character bits may be used.

As shown in FIG. 4, status byte 50 includes information for controlling the operation on memory 28. Status byte 50 includes a mode bit 76 which causes the transponder to operate on all of its internal memory or just a portion thereof. This bit directly provides an output to the program control 46 and, in effect, is "hard wired" to automatically control the transponder circuitry. Specifically, as discussed in detail below, if mode bit 76 is clear, i.e., contains a zero therein, then the transponder will transmit or read from all of memory 28. If mode bit 76 is a one, then transponder 20 may only read from or program into a portion of memory 28 such as the first half of memory 28.

Bits 68 through 74 collectively indicate to the interrogator and transponder the type of transponder that transponder 20 is. For example, if there is an extended memory within transponder 20, then a one may be stored in bit 74 to indicate that transponder 20 is an extended memory transponder (EMT). Bits 68, 70, and 72 may further identify the transponder type such as a laboratory transponder or industrial use transponder to determine a transponder data format most suitable for its intended purpose. Bits 68 through 74 are not hard wired, and therefore are not automatically input to program control 46. Bits 68-74 may also be addressed and reprogrammed by address module 38 and data module 40 to conform transponder 20 to the user's needs.

An HLOCK bit 66 causes program control 46 to disable clock generator 36 in the PROGRAM MODE if the HLOCK bit is set (i.e., has a value of one). If the HLOCK is clear, i.e., has a value of zero, then programming can occur. By disabling the clock generator 36, no data can be written to the address module 38 and data module 40 into memory 28. This bit 66 is hard wired to program control 46 and controls programming of all of the characters in temperature calibration region 52, CRC region 54, data region 56, and user lock region 58 not

selective characters in data region 56 like user lock 58. The HLOCK bit can be addressed and reprogrammed utilizing address module 38 and data module 40 as discussed below, and is used to prevent accidental or inadvertent overwriting of the data in memory 28.

SEAL lock bits 62, 64 hold two bits in combination which can act to seal transponder 20 from any future re-write, making the transponder a permanently read-only transponder. Bits 62, 64 are also hard wired to program control 46 and cause clock generator 36 to be disabled in the PROGRAM MODE. However, unlike the HLOCK bit 66, SEAL bits 62, 64 are not reprogrammable once they are set. To seal the transponder, SEAL 0 should be set during a first write command and on a second write process SEAL 1 should then be set.

It should be noted that the format described above from least significant bit to most significant bit and the relative placement of the different memory regions is by way of example. The individual bits can be arranged in any order as long as one group of bits stores data, one group of bits is mapped to the data bits to act as a lock, and one group of bits acts to prevent programming of the data region as a whole.

The clamp 23 is entirely built, utilizing a CMOS Process, into the integrated circuit devices. Normally, integrated circuit devices such as clamp 23 are built using a bipolar process. A mixed process of bipolar/CMOS is not feasible in making the integrated circuit yet a Zener Diode is still needed in the integrated circuit so that the MOSFET Zener Diode formed from the CMOS process is used instead.

READ MODE

When a continuous voltage signal is received from interrogator 10, clock generator 36 utilizes the interrogator signal as a master clock and outputs a READ EEPROM signal to memory 28 and an INCR ADDR signal to address module 38 which causes address module 38 to sequentially latch the addresses of the memory 28 along the address bus. This causes the addressed data to be output along a DATA BUS to data module 40 where it is then output as a DATA OUT signal to transmitter 42. Transmitter 42 then outputs the data to modulator

32 which outputs a modulated signal to interrogator 10 through antenna 22. Clock generator 36 continuously provides a clock to address module 38 to increment the address being latched by address module 38 while in the READ MODE.

During the READ MODE, clock generator 36 provides a READ EEPROM signal to memory 28. As READ EEPROM signal is input to memory 28, memory 28 is utilizing current. However, during operation of a preferred embodiment, the READ EEPROM signal is output to memory 28 only while address module 38 latches the address in memory 28 and data is output to data module 40. Once the data is output along the DATA BUS, the READ EEPROM signal is disabled until clock generator 36 outputs a successive INCR ADDR signal to increase the address to be addressed by the address module 38. The READ EEPROM signal is then enabled and current is supplied to memory 28 to allow reading of data in memory 28 and this process is repeated until the READ MODE is terminated when power is removed from transponder 20. By cutting off the current supply to memory 28, the overall current consumed during the READ MODE is lowered. Because the memory is in EEPROM, i.e., a static memory, the data is stored even in the absence of current being supplied to memory 28.

Clock generator 36 outputs a PREAMBLE ENABLE signal to transmitter 42 causing transmitter 42 to output a preamble as is known in the art. After a predetermined time period sufficient to output the preamble, clock generator disables the preamble and outputs a DATA ENABLE signal to transmitter 42 causing transmitter 42 to output the DATA OUT signal containing the data from data module 40 so that during the READ MODE, the output of transponder 20 is a preamble followed by the data read from memory 28 which has been modulated by modulator 34. Once a complete cycle of the DATA OUT signal has been output by transmitter 42, clock generator 36 disables the DATA ENABLE and outputs the PREAMBLE ENABLE signal.

PROGRAM MODE

Reference is now also made to FIGS. 6-8 in which the operation of the PROGRAM MODE is illustrated. In order to begin programming, transponder 20 is first read in the READ MODE and the data is verified using data in CRC region 54 of memory 28 in a step 100. Transponder 20 then transmits the data stored in memory 28 as discussed above. Interrogator 10 will then power down antenna 14, in effect turning off transponder 20. Interrogator 10 will then formulate the data to be written into memory 28, i.e. programmed into status byte 50, temperature calibration region 52, CRC region 54, data region 56 or user lock region 58 in a step 102. Interrogator 10 formulates a data string corresponding to each bit of memory 28, even if that bit is not to be reprogrammed. Interrogator 10 utilizing CPU 12 will then analyze the data stored in memory 28. The interrogator will analyze status byte 50 to determine whether or not bits 62, 64 of status byte 50 are set in a step 104. If status bytes 62, 64 are set, then programming is canceled by the interrogator in a step 106.

In a step 108 it is determined whether any bits 57 in data region 56 to be overwritten (reprogrammed) has a corresponding bit 59 in user lock region 58 which is set. If so, then this indicates that the character is not to be changed unless the user lock bit 59 is cleared so writing is canceled in step 106. A separate programming signal must then be sent to clear the user lock.

If the user lock bit 59 corresponding to a character to be reprogrammed is not set then a transponder programming pass for processing all memory locations in memory 28 is performed in a step 112.

Reference is now made to FIG. 8(B). The Nth byte (or subset of bits) of data (corresponding to a character) stored in data region 56 is compared with the Nth byte of the write data in a step 114. If the bytes are the same as determined in a step 116, there is no need to reprogram memory 28 at that data region address and it is determined whether any more bytes are required to be compared in a step 124.

0502696 "021100

If the bytes are different as determined in step 116 then in a step 118 it is determined whether the voltage has been synchronized and if not, voltage synchronization is performed in a step 120. The interrogator and the transponder must first confirm that there is sufficient voltage level for the interrogator signal as received at the transponder for the transponder to properly operate. In an exemplary embodiment, this voltage level is determined to be 2.5 volts. In other words, the signal from the interrogator must produce at least 2.5 volts at the transponder in order to effectively transmit data to the transponder and the 2.5 volt threshold may be used to determine the difference between a zero signal value and a one signal value.

In order to transmit data to the transponder 20, interrogator 10 must determine what output power level will produce the reference voltage at the transponder. This relationship will change as the distance between the interrogator 10 and transponder 20 changes. Transponder 20 assists interrogator 10 in determining this power level by sending feedback in the form of transmitted data that the interrogator 10 can read. The feedback tells interrogator 10 whether the voltage at transponder 20 is presently above or below the threshold voltage.

In step 120 interrogator 10 sends a signal which powers up transponder 20. The interrogator signal is received at antenna 22 and input to comparator 47 where the interrogator signal is compared with a reference voltage REF. By way of example, if the interrogator signal is greater than the reference voltage, comparator 47 outputs a high signal. Conversely, if the received signal is less than the reference voltage, comparator 47 will output a low signal. Comparator 47 outputs an ENCODED RCV DATA signal which is input to transmitter 42. In a preferred embodiment, transmitter 42 will output a first signal a as shown in FIG. 5 if the transponder voltage is below the reference voltage and a second signal b as shown in FIG. 5 if the transponder voltage is above 2.5 volts.

If the pattern received by interrogator 10 indicates that the input voltage is above the desired threshold, i.e., signal b, interrogator 10 reduces the power output and the process is repeated until a pattern indicating below the threshold is received by the interrogator. Once

signal a, which is the inverse of signal b, is output, indicating to interrogator 10 that the voltage received is below the threshold voltage after an adjustment, the power output by interrogator 10 would be increased. This process is repeated until the adjustment required from the interrogator is too fine, i.e., beyond the capabilities of the interrogator to further adjust above or below the threshold voltage. In an alternative embodiment, once an adjustment has become too fine, transponder 20 outputs a signal to interrogator 10 to discontinue adjustment.

By changing the output power level and monitoring the feedback signal, interrogator 10 can deduce the output power level that produces the threshold voltage (2.5 volts) at transponder 20. Once this threshold level is determined, interrogator 10 is able to transmit data to transponder 20 because it knows how to produce an output power that will result in a voltage greater than 2.5 volts at the transponder and conversely it knows the output power that will produce less than 2.5 volts at transponder 20. Transponder 20 translates a voltage of less than a threshold voltage as a zero logic state and a voltage greater than the threshold voltage as a one logic state. Transponder 20 powers up in the feedback mode so that interrogator 10 can quickly determine the threshold voltage transition level. If, however, interrogator 10 is not interested in programming the transponder, it can simply set a constant output power level and wait until transponder 20 switches to the READ MODE and read data from transponder 20.

Once the voltage has been synchronized in step 120 it is determined whether HLOCK bit 66 has been set in step 121. If so, then HLOCK bit 66 must be cleared to permit programming in a step 123. In step 123 a program signal is sent by interrogator 10 to clear HLOCK bit 66.

The program signal has a data format as shown in FIG. 7 in which program signal 200 has a program region 202, a data region 204, and an address region 206. The program region 202 is a single bit, in a preferred embodiment, indicating that the signal is, in fact, a program

signal. The data region 204 includes the data to be programmed into memory 28 and represents a single character. In a preferred embodiment each character is one byte in length and data region 204 is made up of 8 bits, and with compression techniques each character can be represented by less than eight bits, while the data region can remain 8 bits long to program two bits for example if compressed to six bits, of a successive character. Address region 206 contains the data for indicating the address at which the data of the data region 204 is to be written and in a preferred embodiment is five bits.

As shown in FIG. 6, the actual signal transmitted by interrogator 10 which embodies the data of data signal 200 is pulse space modulated. FIG. 6 is a timing diagram of an exemplary signal. In prior art inductively coupled transponders, the communication between the interrogator and the transponder was heavily dependent upon the timing of the transmit and receive signals between the two. The signal in the present invention is timing independent. The signal is made up of a series of fixed or standard pulses 210, the width or spacing between these pulses is modulated by a delay to correspond to the desired data. For example, a zero may correspond to a standard spacing between two pulses 210 while a data 1 is represented by a delayed or elongated spacing between adjacent pulses 210. As a result, timing is no longer a factor. The end of a data transmission cycle may be indicated by remaining in a logic level for a predetermined period of time corresponding to more than the standard pulse or the value of a logic zero or logic one. This is how programming starts in a step 122.

Receiver 44 receives the data as well as a transmit clock from clock generator 36. If receiver 44 detects the leading edge transition of a pulse 210, it then begins comparing the space between the pulses with a count dependent upon the XMIT CLK signal from clock generator 36, for example, eight cycles of the transmit clock. If the received pulse width is less than the transmit clock, then, by way of example, the receiver will determine that the derived data is a zero and transmit that zero to the address module 38 as the RCV DATA

in step 123 only the value of the data being changed in bit 66 is different. In a step 130 it is determined whether any bytes are programmed.

If bytes from memory 28 have been programmed, then the transponder is again read in step 110 and the data read from the transponder is compared with the data that was to be programmed by the interrogator 10 under the control of CPU 12. If any bytes are different, then transponder 20 would be reprogrammed to correct those differences in a step 112. If there are no differences between the bytes of data stored as compared to the bytes of data intended to be programmed, then programming is finished in a step 132, which would be arrived at by determining that in a second go around, no bytes were again programmed in step 130.

If, in step 108 it is determined that one or more user lock bits 59 corresponding to a character is set, a separate programming signal must be sent to clear the user lock. User lock region 58 is programmed to clear the desired bits. This programming is done in a manner similar to that for programming the HLOCK bit including resetting user lock bit 59 after programming the corresponding character bits 57 if desired.

During programming, clock generator 36 outputs a PROGRAM EEPROM signal to memory 28. This signal enables current to memory 28 to allow it to be operated on. Clock generator 36 counts from the time PROGRAM ENABLE enables the clock generator 36 and for a predetermined period sufficient to shift data from data module 40 into the EEPROM of memory 28. Once the predetermined count has been reached, PROGRAM EEPROM is disabled so that no current is provided to the memory, further conserving power.

Program control 46 also reads mode bit 76 of status byte 50. If mode bit 76 is set for example, only half or 16 characters of data region 56 can be accessed either for programming or reading. Mode bit 76 causes program control 46 to output a MODE signal to address module 38 which disables address module 38 from addressing or latching data in the second half of memory 28. As a result, the transponder will act as if it has a memory half the size. This is beneficial where a study utilizing smaller transponders can be mimicked so that a

single transponder can mimic the style of an old study or a new study utilizing the programmable implantable transponder of the invention.

Lastly, if the data in data region 56 is to be permanently maintained, then seal bits 62, 64 may be set by programming ones into them. This is accomplished by first programming SEAL 0, then programming SEAL 1 in a way as described above with programming the HLOCK bit. In this way a programmable lock bit is provided. It should be noted that two bits are used as the permanent seal by way of example, but the seal bit could be one bit, two bits, three bits or more.

TEMPERATURE MODE

During the TEMPERATURE MODE, the transponder is first read in a step 300 as shown in FIGS 9(A), 9(B). In a step 302, voltage synchronization is performed to make sure that an appropriate voltage level temperature command will be sent and received. The voltage synchronization is that described above utilizing comparator 47. A temperature command is sent by interrogator 10 in a step 304 as a pulse space modulated signal as shown in FIG. 6. The signal may be of any length, but in the preferred embodiment, it is five bits and it is received by antenna 22 of transponder 20 and input to receiver 44.

A temperature module 30 is coupled to a thermistor 32. Thermistor 32 changes resistance as a function of temperature and outputs a frequency signal which changes with resistance. Temperature module 30 continuously counts the output of thermistor 32 and outputs the current count as a TEMP DATA signal to data module 40.

In step 306 receiver 44 receives the temperature command and outputs XMIT COMPLETE signal to address module 38 upon completion of the temperature command. The XMIT COMPLETE signal is also output to clock generator 36 and program control 46. Clock generator 36 outputs a LATCH TEMP signal to data module 40 on a periodic basis. At each occurrence of the LATCH TEMP signal, data module 40 outputs the current count of the

TEMP DATA signal as a DATA OUT signal to transmitter 42. Transmitter 42 then outputs the latched count as the XMIT OUT signal to modulator 34 which modulates the signal and outputs the temperature count from antenna 22 to interrogator 10.

Because the frequency monitored by temperature module 30 varies with temperature, the count rate will vary with temperature. Clock generator 36, by outputting a consistent periodic LATCH TEMP signal at a predetermined interval, is utilized to standardize the sampling. This is done to reflect the changes in count as a function in temperature and not of time. In effect, each temperature sampling is the difference between successive latched counts.

Reference is made to FIG. 9B in which the steps 306 for reading transponder temperature data are provided in greater detail. CPU 12 of interrogator 10 has as part of its software a read tries counter. In step 308, the read tries counter is set to zero. In step 310, the temperature data is read as described above i.e. reading a plurality of latched samples. Interrogator 10 outputs a read command signal which results in interrogator 10 receiving a predetermined number of latched counts from temperature module 30. The read tries counter is incremented in a step 312. It is determined whether or not the counter for number of read tries exceeds a predetermined maximum in a step 314. If the number of tries has been exceeded, then this is an indicator that the temperature readings are inaccurate, and the temperature reading has been unsuccessful (step 324) because it is requiring too many tries to obtain an accurate reading and the process is begun again in a step 300 in which transponder data is read.

If the counter for the number of read tries has not exceeded the maximum, then the read has been successful and the temperature data samples are totaled in step 316. In step 318, as an integrity check, it is determined whether the difference between the count for the smallest data sample and the count for the largest data sample is within a predetermined

range. If it falls outside of the range, then the variation is too great and the process is begun again at a step 310.

If the value is within the range, the total data sample temperature from step 316 is then divided by the amount of time required to generate all of the data in a step 320. This is the frequency output by the thermistor. Knowing the relationship between frequency and temperature for the given thermistor, the temperature is calculated in a step 322. In a step 324, it is determined whether the transponder read was successful. If not, the process is begun again at step 300. If the read was successful, then for verification a second read is taken in a step 326 by repeating steps 308-322. In a step 328 it is determined whether the second read was successful. If not, the process is restarted at step 300. If successful then the two counts are compared in a step 330. If they are equal, this temperature is displayed by interrogator 10. If they are not equal then the process is restarted at step 300.

INTEGRITY CHECK

In one embodiment of the invention, the interrogator performs an integrity check of the data being read from transponder 20. Because transponder 20 utilizes the interrogator signal from interrogator 10 as a master clock, interrogator 10 knows the length of time between bits of data transmitted to interrogator 10 by transponder 20. CPU 12 of interrogator 10 includes an accumulator. In a step 400, the accumulator is set to zero. In a step 402, the first transponder bit is received. In a step 404, the next transponder data bit is received. In a step 406 utilizing an on-board clock, interrogator 10 calculates the actual time elapsed between the last successive two data bits. In a step 408, the calculated time in a step 406 is subtracted from the average time expected between two bits. This number is an error number. In a step 410, the error number is added to the accumulator. In a step 412, it is determined whether the accumulator value is greater than an error detection constant. If the value is greater than an error detection constant, than this means the data is out of phase, and in a step 413 interrogator 10 stops receiving data from the transponder 20 and starts the read process over.

If in step 412 the detection constant is still within acceptable tolerances, it is determined in a step 414 whether there are any more incoming transponder data bits. If there are more incoming bits, then the process is repeated at a step 404. If there are no more bits, then the received data is valid and the process is ended.

By utilizing the method, it is no longer required to wait until the very end of the read cycle to determine whether or not a bad read has occurred. Time is saved by arriving at an accurate read more quickly providing a benefit to the user.

It will thus be seen that the objects set forth above, among those made apparent from the preceding description, are efficiently attained and, since certain changes may be made in carrying out the above method in the construction(s) set forth without departing from the spirit and scope of the invention, it is intended that all matter contained in the above description and shown in the accompanying drawings shall be interpreted as illustrative and not in a limiting sense.

It is also to be understood that the following claims are intended to cover all of the generic and specific features of the invention herein described and all statements of the scope of the invention which, as a matter of language, might be said to fall therebetween.

CLAIMS

WHAT IS CLAIMED IS:

1. A transponder comprising:
 - a memory for storing data therein;
 - a clock generator for outputting a read signal for supplying current to the memory;
 - an address module for addressing an address in the memory, said clock generator outputting an address clock signal and said address module selecting an address to be read in response to a clock signal from said clock generator; and
 - a data module for receiving the data stored in said memory at an address indicated by said address module, said clock generator stopping supplying said read signal to turn off said current to said memory once said data has been output to said data module.
2. The transponder of claim 1, wherein said address clock signal is an increased address signal to said address module to change the address of said memory identified by said address module and said clock generator outputting the read signal to supply current to said memory when said increased address signal is supplied to said address module.
3. The transponder of claim 1, wherein said clock generator outputs a program signal for supplying current to the memory to program the memory, and said address clock signal is an address latch signal, the address module selecting a specific address of the memory in response to the address latch signal, said data module inputting data to the memory at the address indicated by the address module, said clock generator stopping supplying current to the memory once the data in the data module has been stored in the memory.

4. The transponder of claim 1, further comprising a program control and said memory having a status byte region and a data region, said program control reading data from said status byte region and in response thereto, outputting a program enable signal to said clock generator to enable said clock generator to output said address signal to said address module.

5. The transponder of claim 4, wherein said status byte region stores at least a first seal bit and a second seal bit, said program control reading said first seal bit and said second seal bit and outputting the program enable signal if at least one of said first seal bit and second seal bit is clear.

6. The transponder of claim 4, wherein said status byte includes an HLOCK bit, said HLOCK bit being capable of being set or clear, said program control reading said HLOCK bit and receiving an address from said address module, and outputting said program enable if said HLOCK bit is clear or said HLOCK bit is set and said address output by said address module corresponds to the address of the status byte within said memory.

7. A transponder comprising:
a memory for storing data therein, said memory having addresses;
a clock generator outputting a program signal for supplying current to the memory to program the memory;
an address module for addressing an address in the memory, said clock generator outputting an address latched signal, said address module selecting an address to be read in response to the address latch signal; and
a data module for inputting data to the memory at the address indicated by the address module, said clock generator stopping supplying current to the memory once the data in the data module has been stored in the memory.

8. The transponder of claim 7, further comprising a program control and said memory having a status byte region and a data region, said program control reading data from

said status byte region and in response thereto, outputting a program enable signal to said clock generator to enable said clock generator to output said address signal to said address module.

9. The transponder of claim 8, wherein said status byte region stores at least a first seal bit and a second seal bit, said program control reading said first seal bit and said second seal bit and outputting the program enable signal if at least one of said first seal bit and second seal bit is clear.

10. The transponder of claim 8, wherein said status byte includes an HLOCK bit, said HLOCK bit being capable of being set or clear, said program control reading said HLOCK bit and receiving an address from said address module, and outputting said program enable if said HLOCK bit is clear or said HLOCK bit is set and said address output by said address module corresponds to the address of the status byte within said memory.

11. The transponder of claim 1, wherein the clock generator outputs an address latch signal to said address module in response to a program signal from an interrogator, said address latch signal causing said address module to select an address to be programmed in accordance with said program signal, said program signal being pulse space modulated.

12. The transponder of claim 6, wherein said status byte further includes a mode bit, said program control reading said mode bit and providing an output to said address module preventing said address module from accessing addresses in said memory not corresponding to the mode indicated by said mode bit.

13. A transponder comprising:
a memory, said memory including a data region and a status byte region;
a clock generator for receiving a program signal and outputting a data latch signal in response thereto;
an address module for receiving said address latch signal and addressing a predetermined address in the memory to be programmed; and

09502696 " 021100

a program control for reading said status byte and outputting a program enable signal in response thereto, said clock generator receiving said program enable signal and outputting said address latch in response to said program enable signal.

14. The transponder of claim 13, wherein said status byte region stores at least a first seal bit and a second seal bit, said program control reading said first seal bit and said second seal bit and outputting the program enable signal if at least one of said first seal bit and second seal bit is not set.

15. The transponder of claim 13, wherein said status byte includes an HLOCK bit, said HLOCK bit being capable of being set or clear, said program control reading said HLOCK bit and receiving an address from said address module, and outputting said program enable if said HLOCK bit is clear or said HLOCK bit is set and said address output by said address module corresponds to the address of the status byte within said memory.

16. A transponder for receiving an interrogator signal, the transponder comprising:
a comparator for receiving said interrogator signal and a reference voltage and outputting a first logic level if the voltage of the interrogator signal is greater than the reference voltage, and outputting a second logic level if the voltage of the interrogator signal is less than the reference voltage; and

a transmitter for receiving said first and second logic levels and outputting a first voltage indicator signal in response to said first logic level and outputting a second voltage indicator signal in response to said second voltage level, the first signal being the inverse of the second signal to indicate to an interrogator a received relative voltage level.

17. A memory for a transponder comprising a data region and a user lock region, said data region storing a plurality of characters;

said user lock region including a plurality of bits, the number of bits in said user lock region at least equaling the number of characters in said data region, each bit of said user lock region corresponding to a respective character, each of said bits in said user

lock region indicating a locked or unlocked status of said respective character in said data region.

18. The memory of claim 17, wherein said data region is formed as a plurality of bits, a subsets of said bits representing a respective character of said plurality of said characters, and each bit of said user lock region corresponding to a respective subset of bits.

19. The transponder of claim 17, wherein said memory further comprises a status byte region, said status byte region storing data indicating that said data region is locked.

20. The transponder of claim 19, wherein said status byte region includes a first seal and a second seal, wherein at least said data region is not permanently locked if at least one of said first seal and said second seal are clear.

21. The transponder of claim 19, wherein said status byte includes an HLOCK region for locking at least the data stored in the said data region.

22. The transponder of claim 19, wherein said status byte includes a mode bit for indicating the mode under which the memory shall be operated upon.

23. A memory for a transponder comprising a data region and a status byte region, the status byte region including at least a permanent lock indicator, said permanent lock indicator exhibiting one of a set state or clear state, said permanent lock indicator exhibiting a clear state indicating that said memory can be programmed.

24. The memory of claim 23, wherein said status byte further comprises an HLOCK bit, said HLOCK bit being capable of being set or clear, to indicate whether at least said data region can be programmed.

25. The memory of claim 23, wherein said status byte further comprises a mode bit, said mode bit indicating which addresses of said memory can be operated upon.

26. The memory of claim 23, further comprising a user lock region, said data region storing the plurality of characters, said user lock region including a plurality of bits, the number of bits in said user lock region at least equaling the number of characters in said data

region, each bit of said user lock region corresponding to respective character, each of said bits in said user lock region indicate a locked or unlocked status of said respective character in said data region.

27. The memory of claim 26, wherein said data region stores a plurality of bits, said plurality of characters being represented by respective pluralities of subsets of said bits, the number of bits in said user lock region at least equaling the number of said subsets of bits in said data region.

28. The memory for a transponder as claimed in claim 23, wherein said permanent lock indicator includes a first seal bit and a second seal bit, said first seal bit and second seal bit exhibiting one of a clear state and set state, at least one of said first bit or second bit indicating a clear state indicating that the data in the data region can be programmed.

29. A method for selectively allowing reprogramming of a transponder memory comprising the steps of:

providing a data region within said memory, the data region including a plurality of characters;

providing a user lock region within said memory, said user lock region having at least as many bits as said plurality of characters in said data region, each bit of said user lock region corresponding to a respective character in said data region; and

setting the bits in the user lock corresponding to the characters in said data region which cannot be reprogrammed.

30. The method of claim 29, wherein said data region includes a plurality of bits, a subset of said bits corresponding to a respective character, and each bit of said user lock region corresponding to a respective subset of bits.

31. The method of claim 29, for selectively allowing reprogramming of a transponder memory further comprising the steps of:

reading data stored in said data region and user lock region from said memory;

determining whether or not a character in the data region to be programmed has a corresponding set bit in said user lock region;

programming the character to be programmed if the corresponding bit in the user lock region is clear; and

not programming the character to be programmed in the data region if the corresponding bit in the user lock region is set.

32. The method of claim 31, further comprising the step of clearing said set bit in the user lock region before programming the corresponding character in said data region.

33. The method of claim 32, further comprising the step of resetting the bit of the user lock region corresponding to the programmed character in the data region.

34. The method of claim 31, further comprising the steps of providing a status byte region in said memory, said status byte region including a first seal bit and a second seal bit; and

reading said bits in said status byte region and preventing programming of the character in said data region if said first seal and second seal bits indicate a lock condition.

35. The method of claim 31, wherein said memory includes a status byte region, said status byte region including an HLOCK bit and further comprising the steps of:

reading said HLOCK bit from the memory; and

preventing programming said character in the data region if the HLOCK bit is set.

36. The method of claim 31, further comprising the step of reading the bits stored in the data region and user lock region;

comparing the character in the data region to be programmed with a character of data to be programmed into the memory;

determining whether the character to be programmed and the character stored in the memory are different;

not programming the data if the characters are the same; and

if the characters are not the same, determining whether or not the corresponding bit in the user lock region is set.

37. A method for determining temperature from a transponder utilizing a thermistor and a running counter comprising the steps of:

providing a running count which varies as a function of temperature;

latching the count at predetermined time intervals;

determining the difference between the values of successive latched counts;

aggregating the differences;

determining the total elapsed time between a first latched count and a last latched count;

dividing the aggregate by the total time to obtain a frequency; and

converting the frequency to a temperature based upon the temperature frequency characteristics of the thermistor.

38. The method of claim 37, comprising the step of determining the difference between the smallest difference obtained and the largest difference obtained and determining whether or not the second difference falls within a range;

beginning the process over if the difference does not fall within the range.

39. The method of claim 38, further comprising repeating the steps to obtain a second temperature value;

comparing a first temperature value to the second temperature value; and
outputting the temperature as a temperature value if the first temperature
value is equal to the second temperature value.

40. A method for checking the integrity of a signal received from a transponder
utilizing an accumulator comprising the steps of:

receiving a first data bit from a transponder;

receiving a next data bit from a transponder;

calculating the actual time elapsed between the last two successive data
bits;

subtract an average time expected between data bits from the actual time
between data bits to produce an error amount;

add the error amount to the accumulator;

determine whether or not an accumulated value is greater than a
predetermined error detection constant; and

stop receiving transponder data bits if the accumulator value is greater
than the error detection constant.

41. An interrogator, said interrogator outputting a command signal corresponding to
a process to be performed by a transponder, said command signal being a pulse width
modulated signal.

42. The interrogator of claim 41, wherein said transponder includes a memory and
said command signal causes data to be programmed into said memory.

43. The interrogator of claim 41, wherein said command signal causes said
transponder to output a temperature.

44. The transponder of claim 1, wherein said transponder is formed as an integrated
circuit and further comprising a clamp, the clamp including at least one MOSFET.

45. The transponder of claim 44, wherein said clamp is formed by a CMOS process.

46. A transponder for receiving power from an outside power source comprising an Integrated Circuit, said integrated circuit including a clamp, the clamp including at least one MOSFET.

47. The transponder of claim 46, wherein said clamp is formed in a CMOS process.

007720 " 96920550

Abstract The purpose of this study was to determine the effect of a 12-week training program on the physical fitness of 100 young adults. The program consisted of three sessions per week, each lasting 45 minutes. The sessions included cardiovascular exercise, strength training, and flexibility exercises. The participants were divided into two groups: a control group and an experimental group. The experimental group showed significant improvements in cardiovascular fitness, strength, and flexibility compared to the control group. The results suggest that a 12-week training program can effectively improve the physical fitness of young adults.

Abstract The purpose of this study was to determine the effect of a 12-week training program on the heart rate (HR) and heart rate reserve (HRR) of sedentary middle-aged men. The study was conducted in a laboratory setting. The subjects were 15 sedentary middle-aged men (mean age 45.2 ± 3.1 years, range 35-55 years). They were divided into two groups: a control group (n = 7) and a training group (n = 8). The control group remained sedentary throughout the study. The training group followed a 12-week training program consisting of three sessions per week, each lasting 30 minutes. The training program was designed to increase the HR and HRR of the subjects. The HR and HRR were measured at rest and during maximal exercise at the beginning and at the end of the 12-week training program. The results showed that the training group had a significant increase in HR and HRR compared to the control group. The HR at rest increased from 68.5 ± 2.5 beats per minute (bpm) to 72.5 ± 2.5 bpm, and the HRR increased from 31.5 ± 2.5 bpm to 35.5 ± 2.5 bpm. The HR during maximal exercise increased from 175.5 ± 2.5 bpm to 179.5 ± 2.5 bpm, and the HRR increased from 107.5 ± 2.5 bpm to 111.5 ± 2.5 bpm. The results suggest that a 12-week training program can effectively increase the HR and HRR of sedentary middle-aged men.

ALEC Transponder / Interrogator Overview Block Diagram

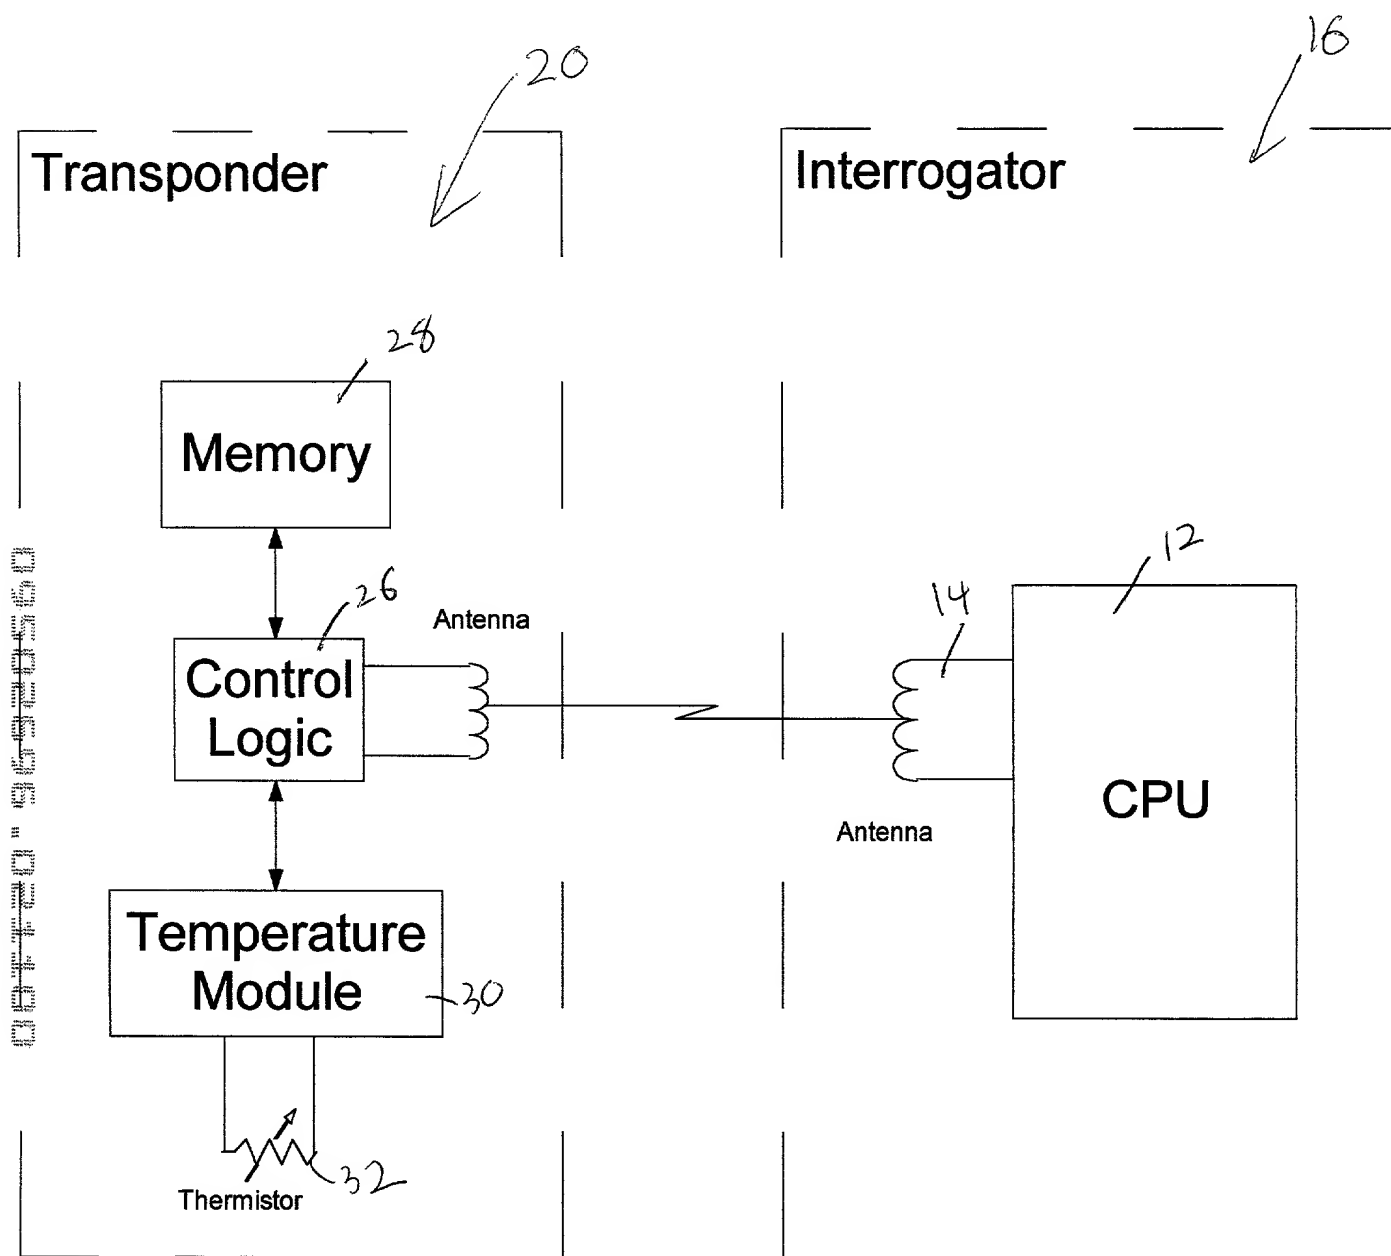


FIG. 1

22

24

20

26

28

30

34

36

38

40

42

44

46

47

25

27

29

31

33

35

37

39

41

43

45

47

49

51

53

55

57

59

61

63

65

67

69

71

73

75

77

79

81

83

85

87

89

91

93

95

97

99

101

103

105

107

109

111

113

115

117

119

121

123

125

127

129

131

133

135

137

139

141

143

145

147

149

151

153

155

157

159

161

163

165

167

169

171

173

175

177

179

181

183

185

187

189

191

193

195

197

199

201

203

205

207

209

211

213

215

217

219

221

223

225

227

229

231

233

235

237

239

241

243

245

247

249

251

253

255

257

259

261

263

265

267

269

271

273

275

277

279

281

283

285

287

289

291

293

295

297

299

301

303

305

307

309

311

313

315

317

319

321

323

325

327

329

331

333

335

337

339

341

343

345

347

349

351

353

355

357

359

361

363

365

367

369

371

373

375

377

379

381

383

385

387

389

391

393

395

397

399

401

403

405

407

409

411

413

415

417

419

421

423

425

427

429

431

433

435

437

439

441

443

445

447

449

451

453

455

457

459

461

463

465

467

469

471

473

475

477

479

481

483

485

487

489

491

493

495

497

499

501

503

505

507

509

511

513

515

517

519

521

523

525

527

529

531

533

535

537

539

541

543

545

547

549

551

553

555

557

559

561

563

565

567

569

571

573

575

577

579

581

583

585

587

589

591

593

595

597

599

601

603

605

607

609

611

613

615

617

619

621

623

625

627

629

631

633

635

637

639

641

643

645

647

649

651

653

655

657

659

661

663

665

667

669

671

673

675

677

679

681

683

685

687

689

691

693

695

697

699

701

703

705

707

709

711

713

715

717

719

721

723

725

727

729

731

733

735

737

739

741

743

745

747

749

751

753

755

757

759

761

763

765

767

769

771

773

775

777

779

781

783

785

787

789

791

793

795

797

799

801

803

805

807

809

811

813

815

817

819

821

823

825

827

829

831

833

835

837

839

841

843

845

847

849

851

853

855

857

859

861

863

865

867

869

871

873

875

877

879

881

883

885

887

889

891

893

895

897

899

901

903

905

907

909

911

913

915

917

919

921

923

925

927

929

931

933

935

937

939

941

943

945

947

949

951

953

955

957

959

961

963

965

967

969

971

973

975

977

979

981

983

985

987

989

991

993

995

997

999

1001

1003

1005

1007

1009

1011

1013

1015

1017

1019

1021

1023

1025

1027

1029

PROPERTY OF: UMG, Inc.
602 PARK POINT DR. #130
GOLDEN, CO 80401
DRAWING #: 080004 REV. A
DRAWN BY: DAVID ELLWOOD
DATE: 8/5/99

FIG. 3


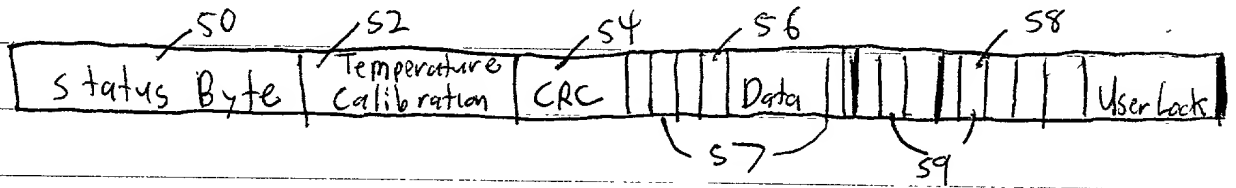


FIG. 4

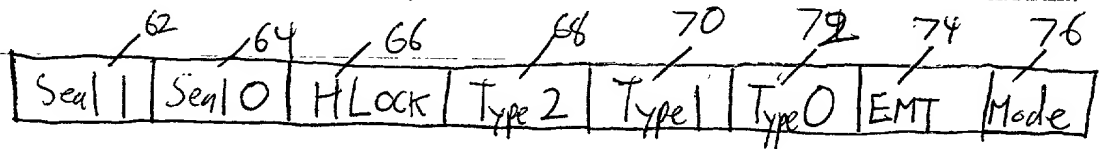

09502595-021100

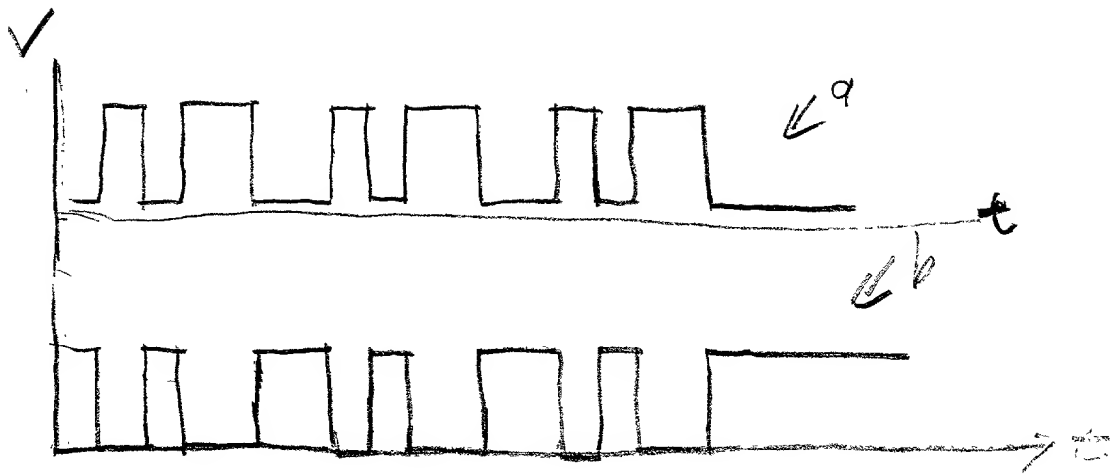


FIG. 5

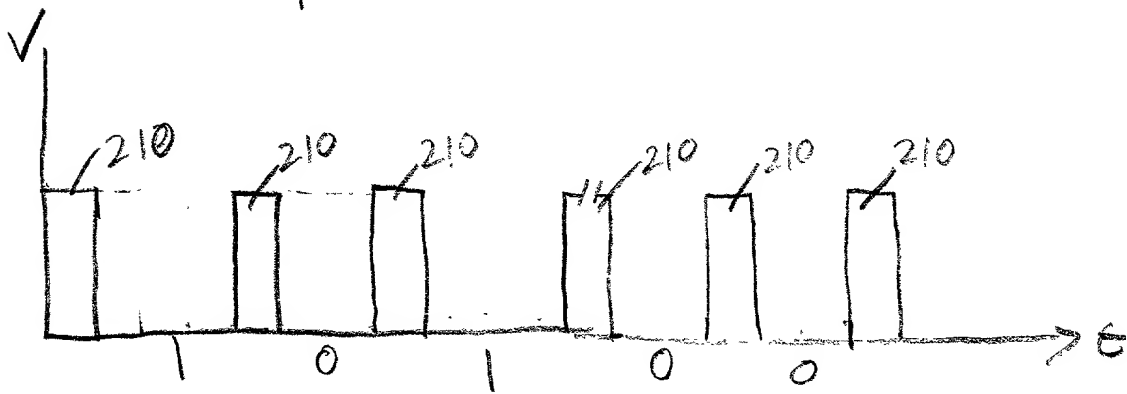


FIG. 6

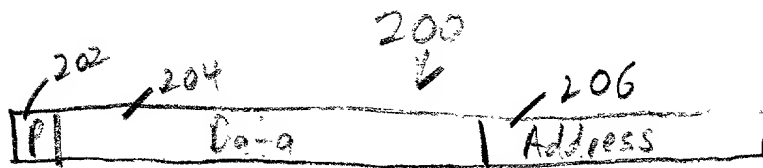


FIG. 7

ALEC Transponder Write Data Algorithm

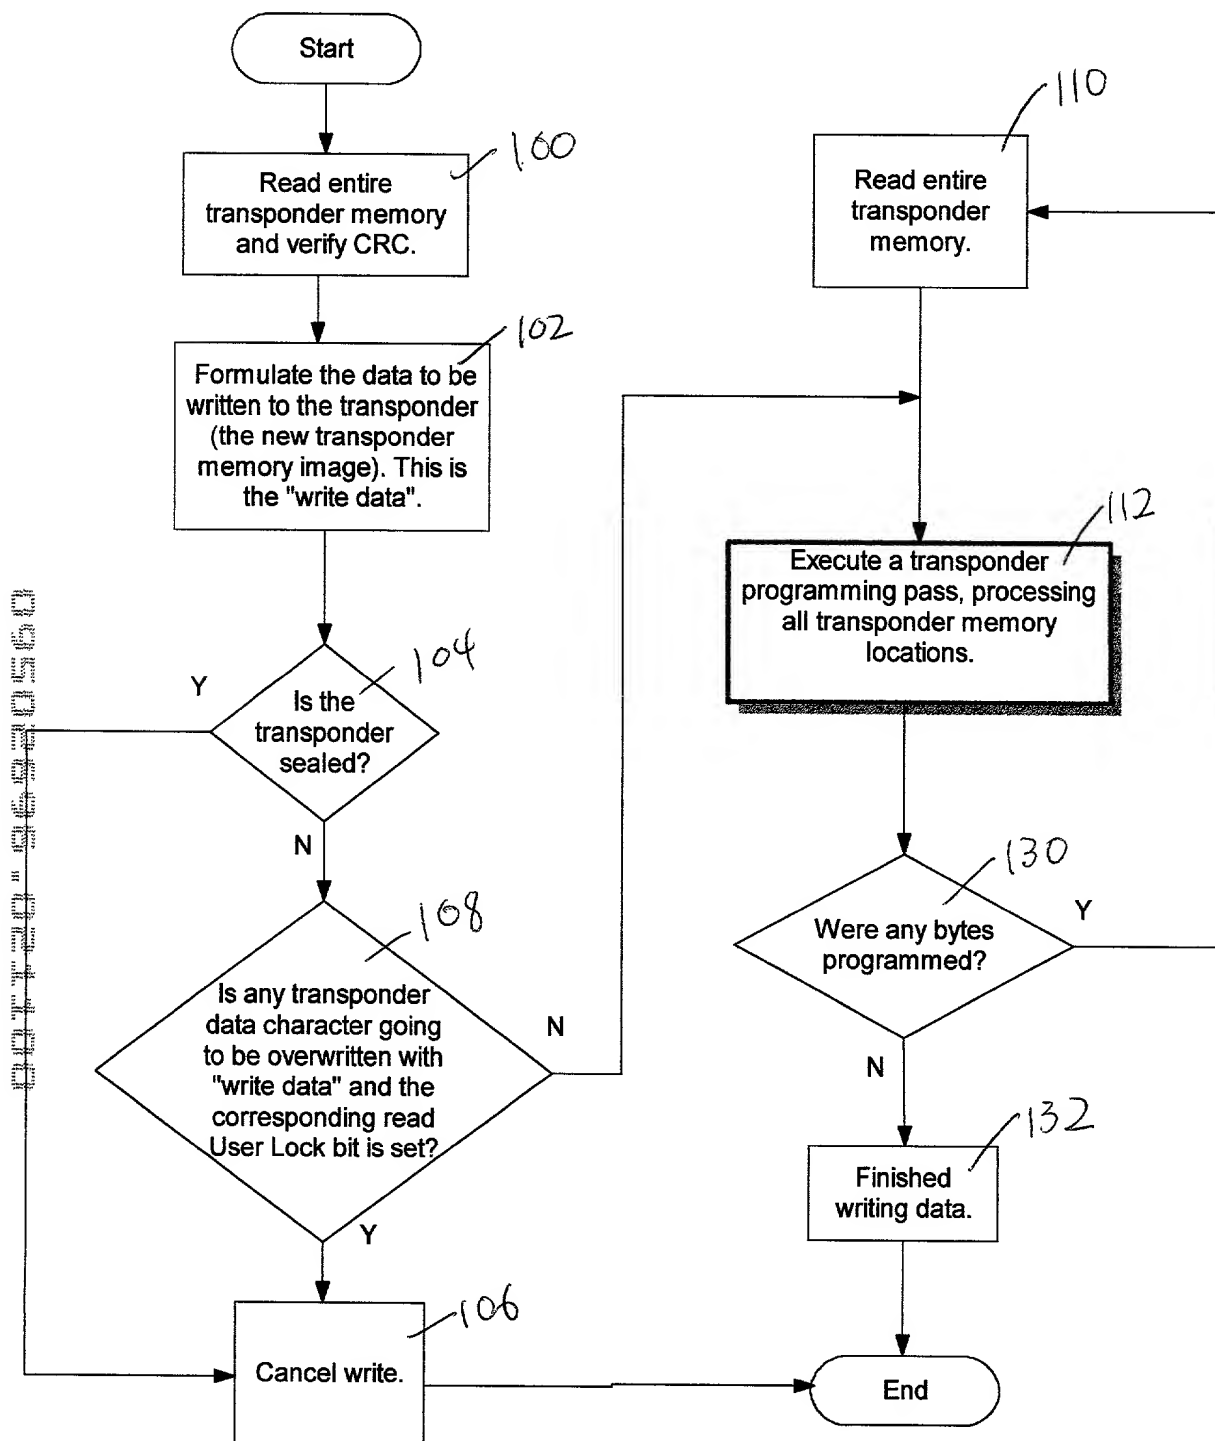


FIG. 8 (A)

ALEC Transponder Write Data Algorithm


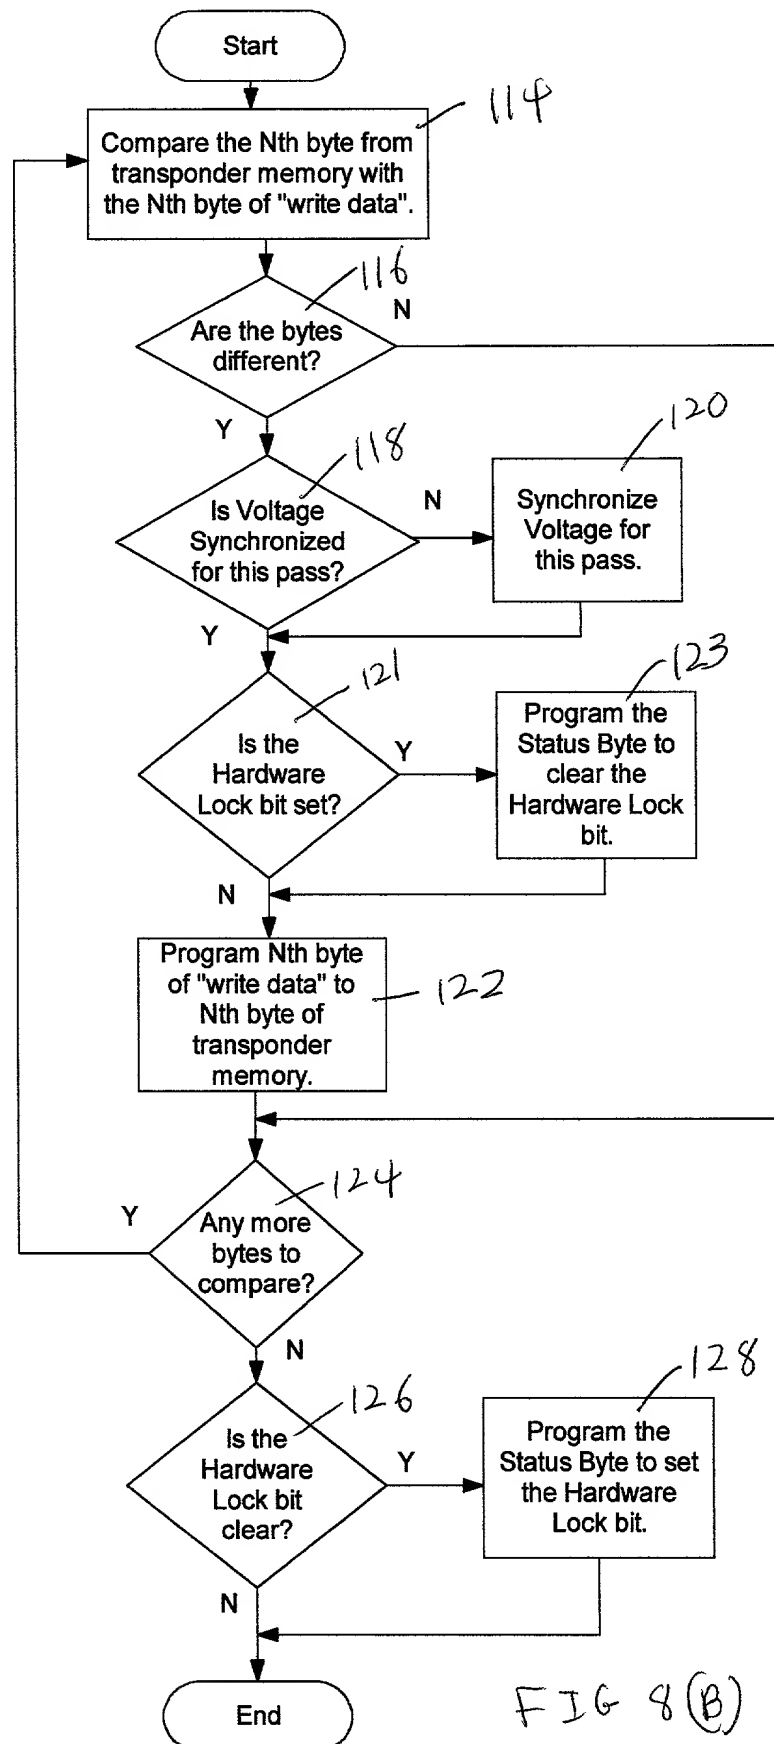


FIG 8(B)


09502696 "021100

ALEC Transponder Read Temperature Algorithm

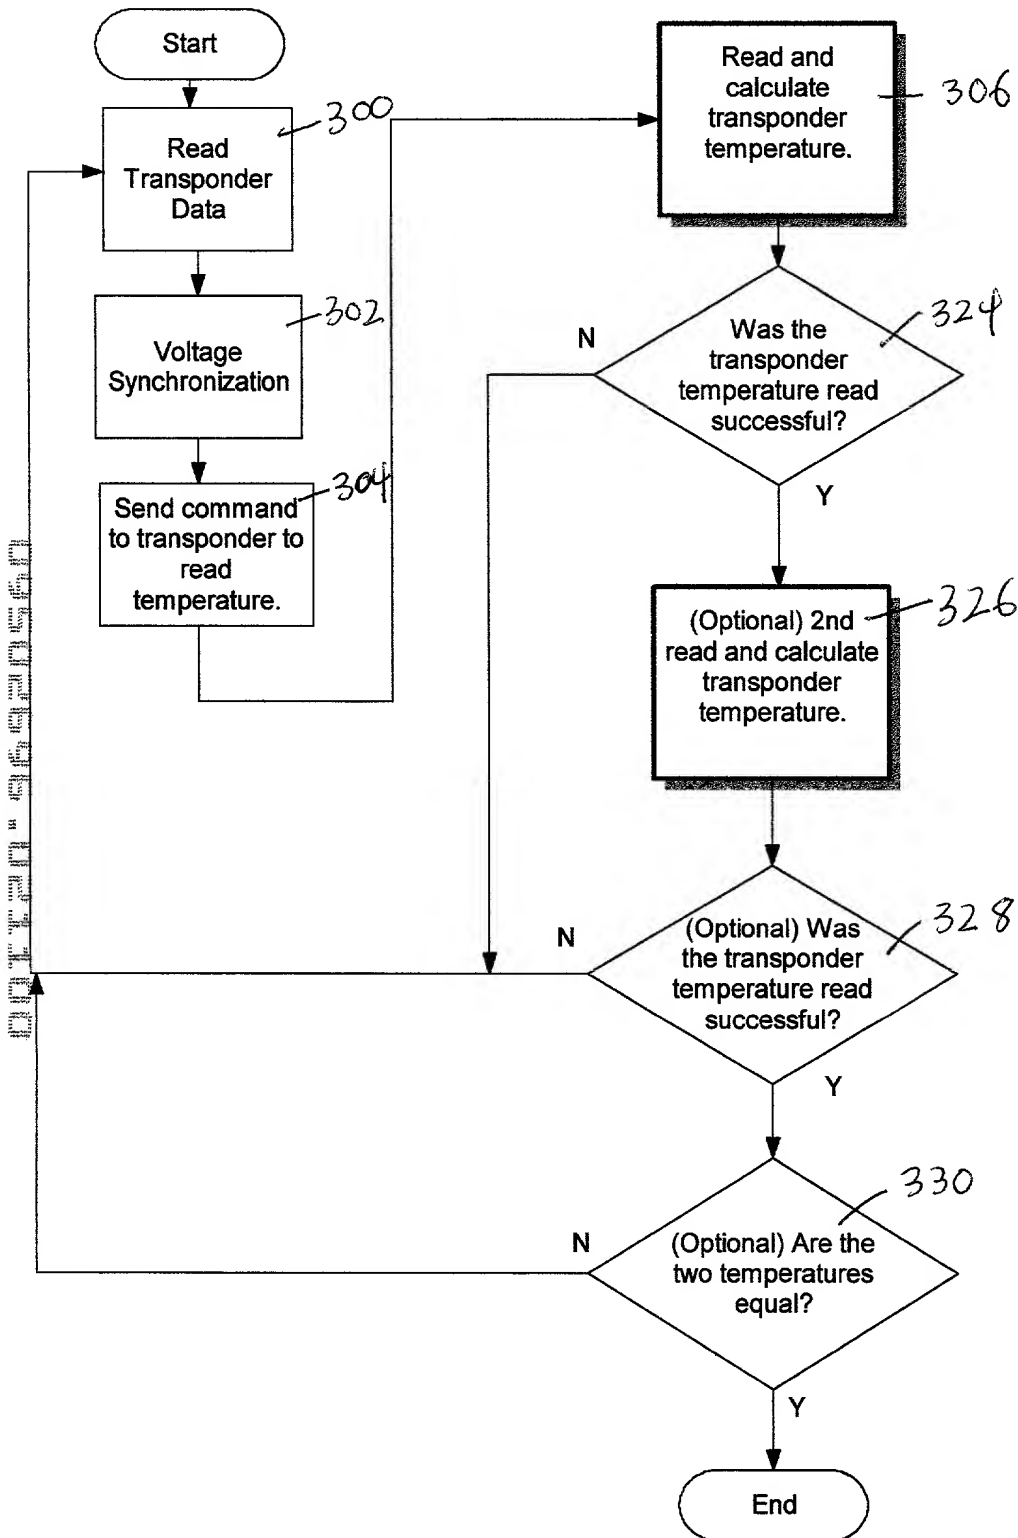

9(A)

ALEC Transponder Read Temperature Algorithm

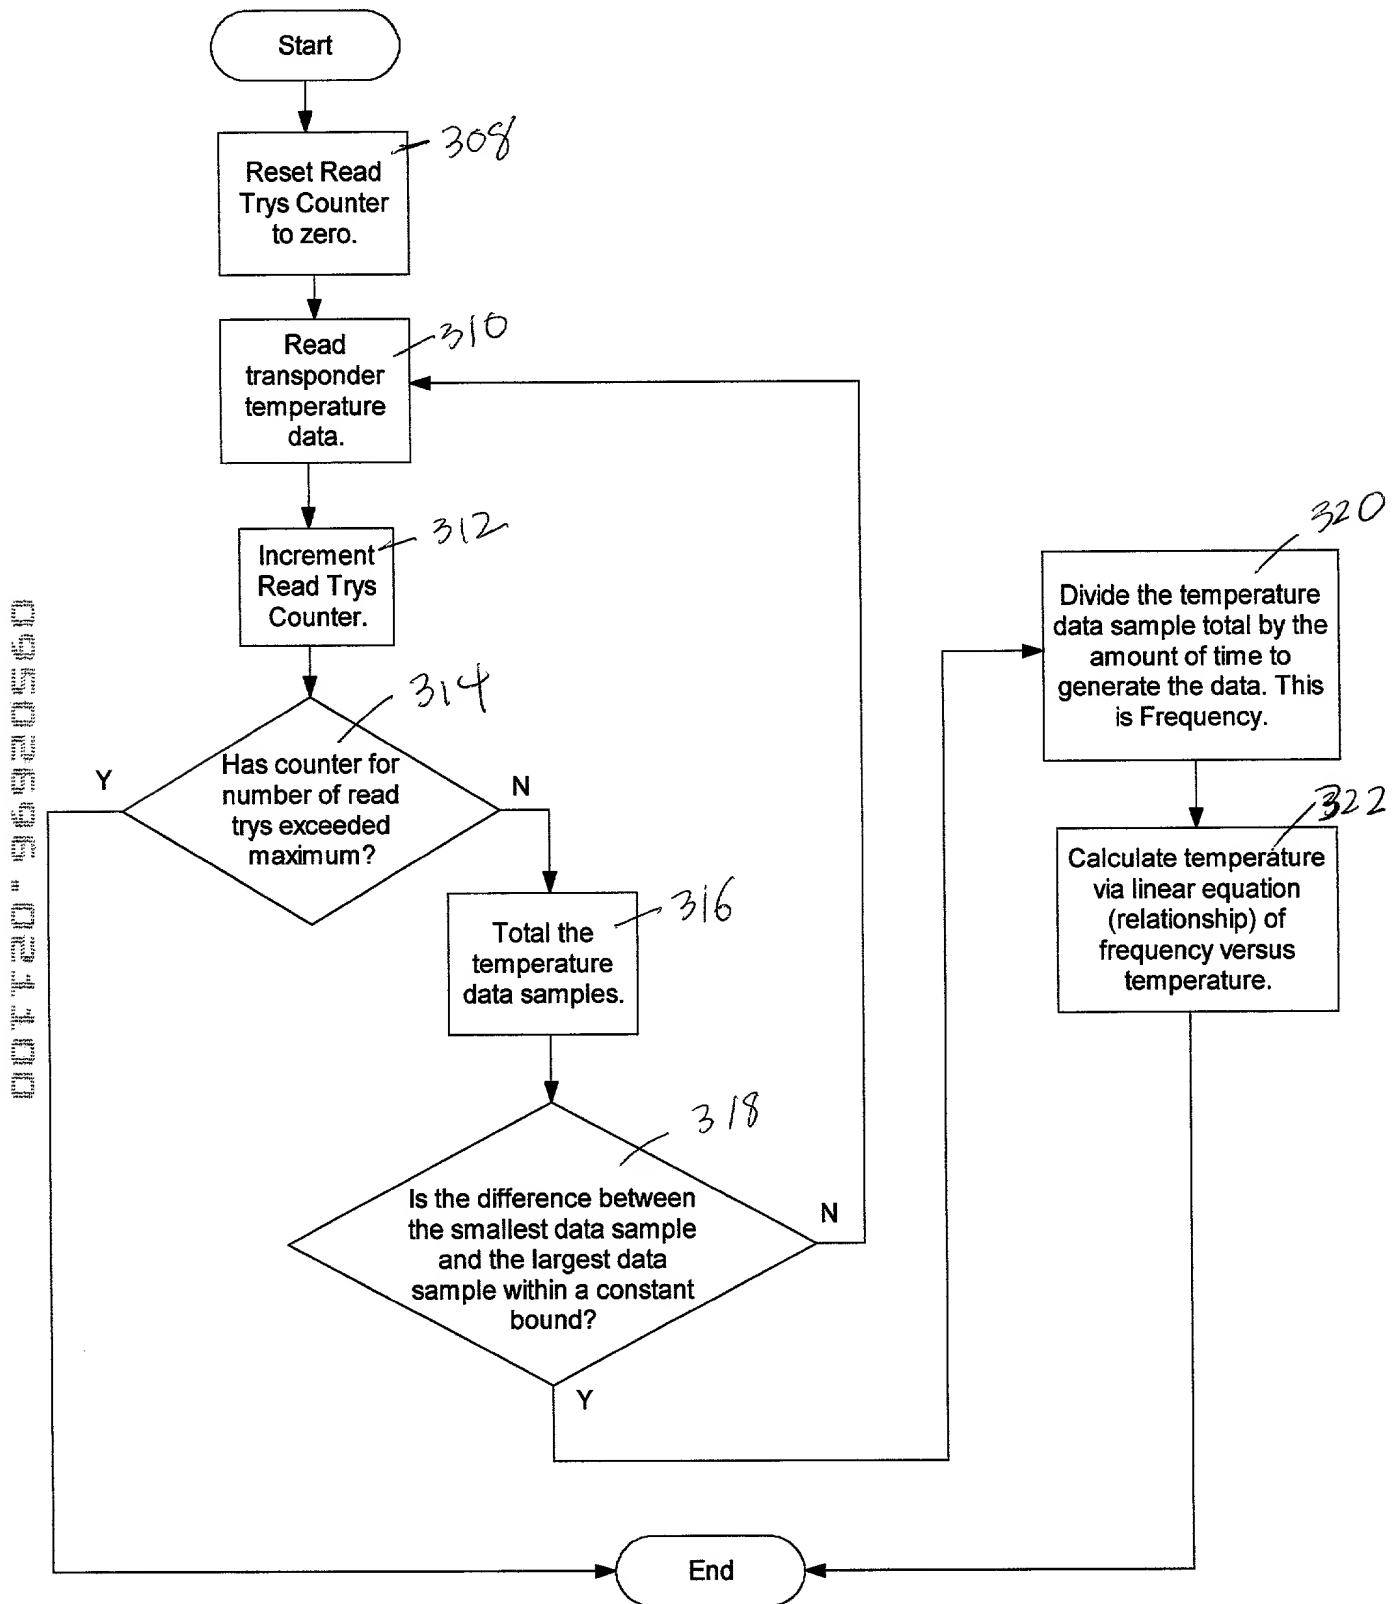

9(B)

[illegible]

FIG 10

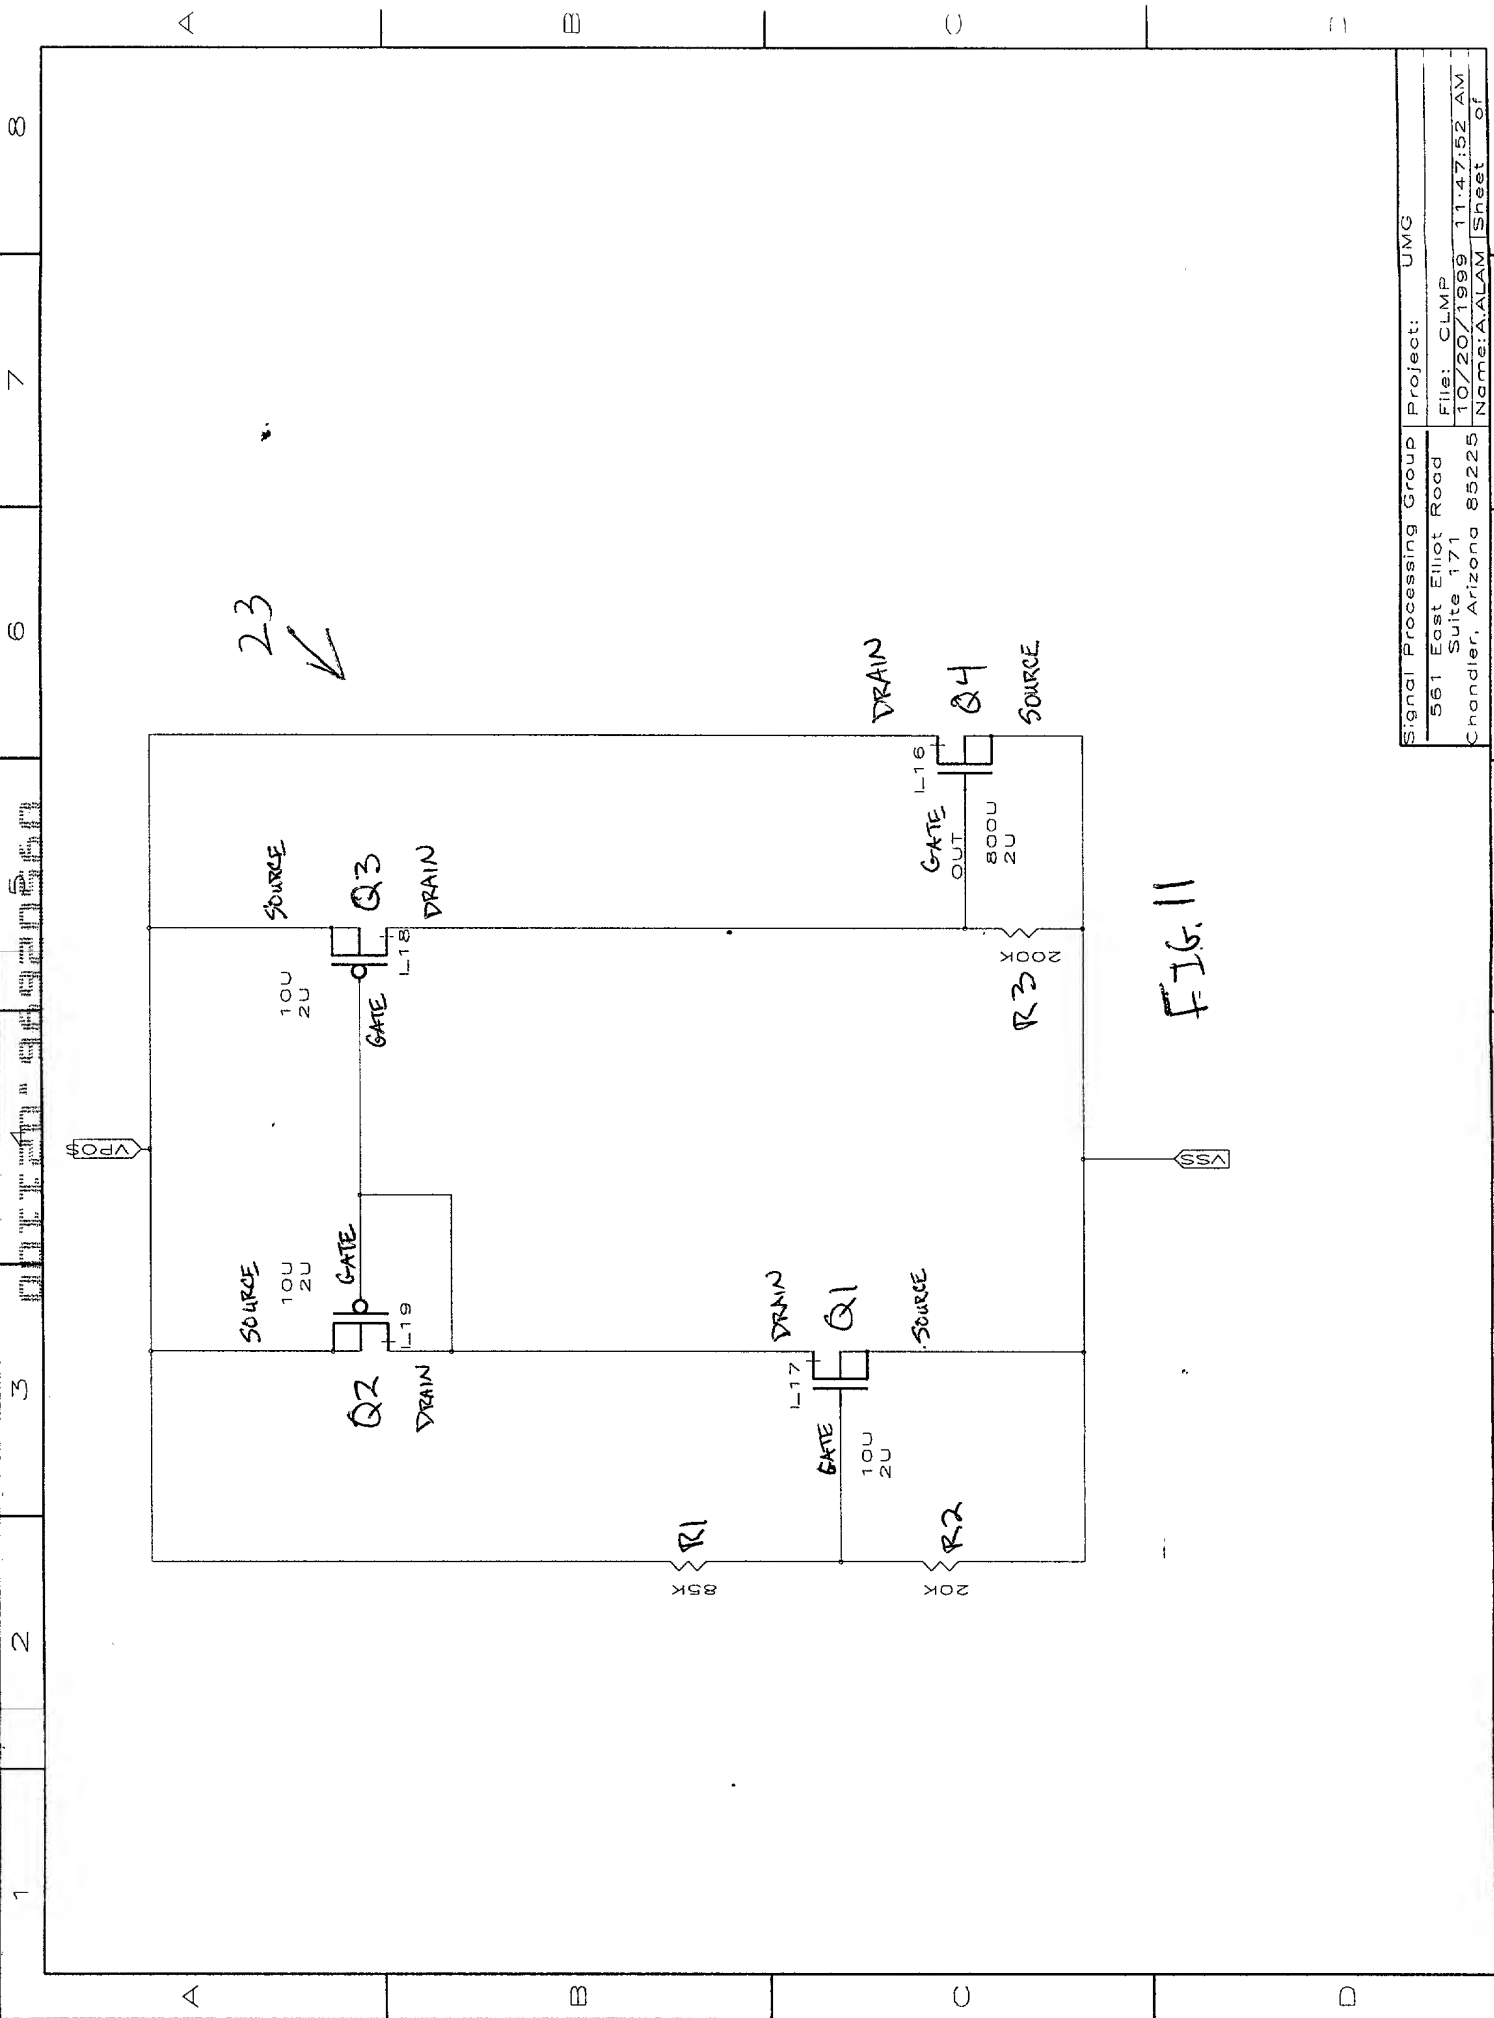


FIG. 11

Signal Processing Group	Project:	UMG
561 East Elliot Road Suite 171 Chandler, Arizona 85225	File: CLMP 10/20/1999 11:47:52 AM Name: ALAM	Sheet of 8

Please type a plus sign (+) inside this box → ☒

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.3) <input checked="" type="checkbox"/> Declaration Submitted with initial Filing OR <input type="checkbox"/> Declaration Submitted After initial Filing (surcharge (37 CFR 1.6(e)) required)	Attorney Docket Number	068856/221
	First Named Inventor	Donald J. Urbas
	<i>COMPLETE IF KNOWN</i>	
	Application Number	New Application
	Filing Date	Concurrently Herewith
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**IMPLANTABLE INDUCTIVELY PROGRAMMED
TEMPERATURE SENSING TRANSPONDER**

the specification of which

☒ is attached hereto
OR

(Title of the Invention)

☐ was filed on

as United States Application Number or PCT International

Application Number

and was amended on (MM/DD/YYYY)

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

(Page 1 of 3)

Burden Hour Statement: This form is estimated take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SENT TO: Assistant commissioner for Patents, Washington, DC 20231.

20070375v1

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION – Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America listed below, and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and

Trademark Office connected therewith: ☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below.

Name	Registration Number	Name	Registration Number
Lawrence Rosenthal	24,377		
Steven B. Pokotilow	26,405		
Howard M. Gitten	32,138		
Matthew W. Siegal	32,941		


☐ Additional registered practitioner(s) named on supplemental registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label

☐ Correspondence address below

Name	STROOCK & STROOCK & LAVAN LLP				
Address	180 Maiden Lane				
Address					
City	New York	State	New York	ZIP	10038
Country	US	Telephone	(212) 806-5400	Fax	(212) 806-6006

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])		Family Name or Surname			
Donald J.		Urbas			
Inventor's Signature				2-3-00	Date
Residence: City	Evergreen	State	CO	Country	U.S.
Citizenship	U.S.				
Post Office Address					
Post Office Address	31182 Island Drive				
City	Evergreen	State	CO	Zip	80439
Country	U.S.				

☒ Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

(Page 2 of 3)

Please type a plus sign (+) inside this box → ☐



PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE


Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION	ADDITIONAL INVENTOR(S) Supplemental Sheet Page 3 of 3
--------------------	--

Name of Additional Joint Inventor, if any:					<input type="checkbox"/> A petition has been filed for this unsigned inventor		
Given Name(first and middle [if any])					Family Name or Surname		
David					Ellwood		
Inventor's Signature					2/3/00	Date	
Residence: City	Lake Wood	State	CO	Country	U.S.	Citizenship	U.S.
Post Office Address	265B West Kentucky Drive						
Post Office Address	580 S. Field Ct.						
City	Lake Wood	State	CO	ZIP	80226	Country	U.S.
Name of Additional Joint Inventor, if any:					<input type="checkbox"/> A petition has been filed for this unsigned inventor		
Given Name(first and middle [if any])					Family Name or Surname		
Eric B.					Weddington		
Inventor's Signature					00-02-03	Date	
Residence: City	Evergreen	State	CO	Country	U.S.	Citizenship	U.S.
Post Office Address	6471 Arapahoe Drive						
Post Office Address							
City	Evergreen	State	CO	ZIP	80439	Country	U.S.
Name of Additional Joint Inventor, if any:					<input type="checkbox"/> A petition has been filed for this unsigned inventor		
Given Name(first and middle [if any])					Family Name or Surname		
Inventor's Signature					Date		
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	

Burden Hour Statement: This form is estimated take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SENT TO: Assistant commissioner for Patents, Washington, DC 20231.

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

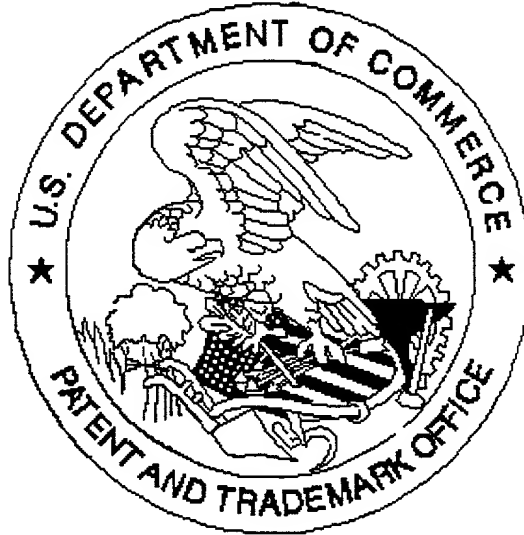

Application deficiencies were found during scanning:

☐ Page(s) _____ of No Transmittal were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Scanned copy is best available.